The complete article index: 1996

This index lists all articles published by RF Design *in the past year. They are organized into major topic categories, and listed in chronological order within those categories. Past years are available on microfilm and microfiche from UMI at 800-521-0600 or 313-761-4741 (from outside the United States). Photocopies of back issues and of specific articles are available from UMI Information Store at 800-248-0360 or 415-433-5500 Ext. 282 (from outside the United States). Information Store will need the following information when ordering: ISSN number 0163-321x; Issue date; Article title; Article; author; Page number. Questions and comments concerning the articles listed should be addressed to: Technical editor,* RF Design, *5660 Greenwood Plaza Blvd., Suite 350, Englewood, CO 80111.*

Amplifier design

"High Linearity HBT Amplifier Targets Multicarrier Systems," William J. Pratt, March 1996, p. 47.

"An Introduction to Class-F Power Amplifiers," Frederick H. Raab, May 1996, p. 79.

"Controlled Bypassing Sets Limiter Threshold," Gary Breed, June 1996, p. 85.

"Wideband High-Efficiency Power Amplifiers," Robert J. Dehoney, July 1996, p. 22.

"Feedback Improves AGC Amplifier

A New Day is Dawning in the RF World
for Contract Manufacturing.
II MORROW
800.879.6641 or visit our home page at http://www.iimorrow.com/contract.htm
II Morrow Inc., 2345 Turner Rd SE, Salem OR 97302

INFO/CARD 36

The complete article index: 1996

This index lists all articles published by RF Design *in the past year. They are organized into major topic categories, and listed in chronological order within those categories. Past years are available on microfilm and microfiche from UMI at 800-521-0600 or 313-761-4741 (from outside the United States). Photocopies of back issues and of specific articles are available from UMI Information Store at 800-248-0360 or 415-433-5500 Ext. 282 (from outside the United States). Information Store will need the following information when ordering: ISSN number 0163-321x; Issue date; Article title; Article; author; Page number. Questions and comments concerning the articles listed should be addressed to: Technical editor,* RF Design, *5660 Greenwood Plaza Blvd., Suite 350, Englewood, CO 80111.*

Amplifier design

"High Linearity HBT Amplifier Targets Multicarrier Systems," William J. Pratt, March 1996, p. 47.

"An Introduction to Class-F Power Amplifiers," Frederick H. Raab, May 1996, p. 79.

"Controlled Bypassing Sets Limiter Threshold," Gary Breed, June 1996, p. 85.

"Wideband High-Efficiency Power Amplifiers," Robert J. Dehoney, July 1996, p. 22.

"Feedback Improves AGC Amplifier

A New Day is Dawning in the RF World
for Contract Manufacturing.
II MORROW
800.879.6641 or visit our home page at http://www.iimorrow.com/contract.htm
II Morrow Inc., 2345 Turner Rd SE, Salem OR 97302

INFO/CARD 36

Harmonic Performance," Chris Trask, August 1996, p. 81.

Antennas and propagation

"Notes on Electrically Small Antennas," Gary A. Breed, March 1996, p. 64.

"A Novel GPS Avionics Slot Antenna," Chien H. Ho, Paul K. Shumaker, Keith B. Smith, Juhn W. Wang and Hua Y. Wang, August 1996, p. 26.

"Selecting Vertical Radiation Patterns for Directional Base-Station Antennas," Charles M. DiFronzo," August 1996, p. 34.

"Log-Periodic Antenna as a Standard-Gain Antenna," John R. Tighe, Sharon Bradley and Joe Granados, August 1996, p. 44.

The choice is yours!

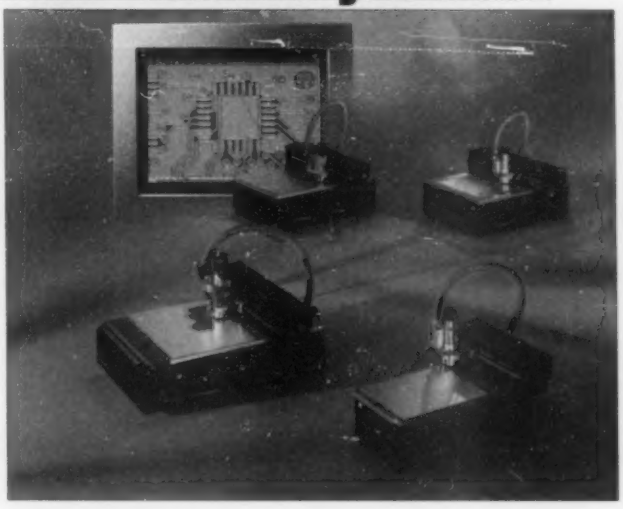

Save time and money on prototype circuit boards with a system from LPKF's PROTOMAT family. Choose from four systems to match your application and produce your circuit in a couple of hours.

Software
- Windows 3.1,95,NT
- Macro insulation capability
- Full tool life management
- More insulation flexibility
- Fastest rubout method available
- Supports all standard PCB CAD formats
- Included with all systems

System
- Speed to 60,000 RPM for fine structures
- Automatic tool change
- Low noise level
- Automated through-hole plating option
- Immediate delivery
- Use no caustic chemicals
- Supports RF board materials

Make your choice today, call...
1-800-345-LPKF

LPKF CAD/CAM SYSTEMS INC.
6190 S.W. Arctic Drive, Beaverton, OR 97005

fax (503) 642-3862
email: LPKF@northwest.com
See our web page at:
http://www.LPKFCADCAM.com

INFO/CARD 37

Circuit analysis

"Capacitor Behavior at Radio Frequencies," Gary A. Breed, January 1996, p. 58.

"RF Circuits for Communications Applications," Steve Andrezyk and Raphael Matarazzo, January 1996, p. 74.

"Noise Figure Modeling of Bipolar Transistors Using SPICE," Keelan Jennings and J. Alvin Connelly, February 1996, p. 33.

"A Tutorial on Intermodulation Distortion and Non-Linearity in RF Systems," Jeffrey Pawlan, February 1996, p. 71.

"A Tutorial on Intermodulation Distortion: Part 2–Practical Steps for Accurate Computer Simulation," Jeffrey Pawlan, March 1996, p. 74.

"Sideband Suppression Considerations for Complex Baseband Processing of FDM Waveforms," Rock Roberts, April 1996, p. 32.

"Noise Sources and Noise Calculations for Op Amps," Stephan Baier, May 1996, p. 66.

"Pull-out Range and Noise Bandwidth of Third Order PLL," Fu-Nian Ku, June 1996, p. 79.

"Cost-effective Evaluation of Digital Communication ICs," Marc Brendan Judson, October 1996, p. 56.

"Bias-circuit Methods to Reduce Process and Temperature Variations in GaAs MESFET ICs Are Compared," Joe Staudinger, December 1996, p. 20.

"Reducing IM Distortion in CDMA Cellular Telephones," Dick Bain, December 1996, p. 46.

Components

"RF Transformers Part 2: The Core, Nic Hamilton," January 1996, p. 64.

"Inductor Behavior at Radio Frequencies," Gary A. Breed, February 1996, p. 67.

"Structured Design of Third-Order, Type-2 and Type-3 PLLs," Fu Nian Ku, April 1996, p. 95.

"A Low Voltage FMIF System for DECT and Other High Speed GFSK," Yangpeng Guo, Randall Yogi and Alvin Wong, May 1996, p. 36.

"SAW-based Frequency Control Products for Modern Telecommunications Systems," C. S. Lam, D. S. Stevens and D. J. Lane, June 1996, p. 76.

"The Role of Digital Signal Processors in Pager Technology," Xiao-an Wang and Dwane Bell, December 1996, p. 36.

Filter design

"Computing Image Filter Requirements for Digital Cellular Radios," Alex

Gletfelter, February 1996, p. 76.

"Reducing Active Filter Cost Using Symbolic Three-Pole Synthesis," Glenn A. Parker, March 1996, p. 70.

"Active Filter and Other Op Amp Circuits for RF Applications," Gary A. Breed, April 1996, p. 74.

"Microstrip Bandstop Filter Cuts Spurious Carrier Frequencies," Denis Jaisson, September 1996, p. 30.

"A Simple Chebychev Bandpass Impedance-matching Program," Yves Borlez, October 1996, p. 80.

"RF Lumped-notch Filter Design for FCC Compliance Testing of Wireless Radio Modems," Lizhong Zhu, Bryan Taylor, Perry Jarmuszewski, November 1996, p. 36.

Our New IF SAW Filters for WLAN Have Everyone Communicating.

Combining high performance with competitive pricing, Sawtek's new IF SAW filters for wireless local area networks (WLANs) are setting new standards in wireless communication. Designed to support the emerging IEEE 802.11 standard, these filters offer competitive advantages like:

- Small size (SMP-28) — 7.0 mm by 5.5 mm by 1.67 mm
- Low insertion loss — 13 to 14 dB maximum
- Low group delay — less than 100 nsec peak-to-peak
- High ultimate rejection — 40 to 55 dB minimum

Standard WLAN Filter Specifications



Part Number	Center Frequency (MHz)	3 dB Bandwidth (MHz)
855091	240	2 minimum
855092	240	10 minimum
[illegible]	[illegible]	[illegible]
855094	325	10 minimum

For more information, contact

SAWTEK INCORPORATED

P.O. Box 609501
Orlando, Florida 32860-9501
Telephone: 407-886-8860
Fax: 407-886-7061
http: //www.sawtek.com

INFO/CARD 38

Frequency synthesis

"Isolator for DECT Open-loop Modulation," Rishi Mohindra, January 1996, p. 30.

"High Level Integration and Performance Comes to DDS," Dave Crook and Jim Surber, April 1996, p. 56.

"Dual DDS Offers High Performance for Critical Applications," Jonathan King, May 1996, p. 44.

"Designing a Frequency Synthesizer Using Low-temperature Co-fired Ceramic, Michael C'Hearn," November 1996, p. 46.

General purpose software

"Software System Adds New RF Layout Capability," Eagleware Corporation Staff, February 1996, p. 51.

"Program Accelerates Receiver and Transmitter Design," Mark Atkinson, July 1996, p. 36.

"A Circuit Simulator for Microwave and Wireless Applications," Ulrich L. Rohde, August 1996, p. 56.

High-speed analog and digital circuits

"Microwave Integrated Circuits Meet HF Project Demands for High-dynamic Range," Adrian I. Cogan, Donald Apte, Frank Sulak, Thomas Wei, Jim Spear and Lee B. Max, September 1996, p. 64.

Industry insight

"No More Talk About Talk—Broadband PCS Hitting the Airwaves," Andy Kellett, January 1996, p. 26.

"Wireless Telemetry Plays a Major Role in Market Growth," Gary A. Breed, February 1996, p. 30.

"Packaging Drives RF Power Device Development," Gary A. Breed, March 1996, p. 30.

"DSP Grows in Importance for New Communications Technologies," Gary A. Breed, April 1996 p. 28.

"Digital Cellular Technology Drives Component and Instrument Makers," Gary A. Breed, May 1996, p. 26.

"Broadcast Industry Eyes New Transmission Technologies," Gary A. Breed, June 1996, p. 22.

"Production Testing Grows as an RF Product's Design Requirement," Gary A. Breed, July, 1996, p. 61.

"RF Research Rising on Tide of Commercial Activity," Andy Kellett, August 1996, p. 24.

Miniaturization—The Shrinking Circuit, Ernest Worthman, September 1996, p. 28.

"RF Technology on the Cutting Edge of Science," Ernest Worthman, October 1996, p. 22.

"The FCC's RF Exposure Standards—the Newest Design Hurdle," Robert H. Schwaninger Jr., November 1996, p. 24.
"RF in Industry," Ernest Worthman, December 1996, p. 18.

Oscillator design

"Inductive Tuned Oscillator," Dien Nguyen, September 1996, p. 80.

Phase shifters and matching networks

"Use Matrix Models to Make Analysis Easy for Microstrip Matching Circuits," R. Partha, September 1996, p. 50.

Product forum

"Spread Spectrum ICs Aimed at ISM Band Applications," January 1996, p. 92.

Product focus

"Power Transistors," February 1996, p. 63.
"Communications Test Equipment," March 1996, p. 58.
"Crystal Oscillators," April, 1996, p. 69.
"Cables & Connectors," May 1996, p. 62.
"Mixers," June 1996, p. 90.
"CAD for Circuits," August 1996, p. 87.
'Power Meters," October 1996, p. 92.
"SAW," December 1996, p. 64.

RF systems

"Considerations and Trade-offs for Specifying, Designing and Installing Wireless Systems," David J. Beal, June 1996, p. 24.
"Use Adaptive Digital Predistortion to Simulate a Linearization System," Ro-man Gloeckler, October 1996, p. 24.
"Standardized IS-95 CDMA System Simulation Aids Advanced Design," Paul Washkewicz, October 1996, p. 47.

RFI and EMI

"Estimating Radiated Emissions for Electronic Products," Peter Vizmuller, August 1996, p. 76.
"How to Design Shielding to Meet EMI Specifications," William Massey, November 1996, p. 54.

Test and measurement

"Using RF Channel Sounding Measurements to Determine Delay Spread and Path Loss," William G. Newhall, Kevin Saldanha, and Theodore S. Rappaport, January 1996, p. 82.
"A Cable Telephony Transceiver Test System," Mike McNatt, March 1996, p. 35.
"A Spread Spectrum Sliding Correlator for Propagation Measurements,"

Accessories for rf testing

Ultra-broadband E and H field monitor • Four-channel capability. Five E-field probes available. Two standard isotropic probes cover 10 kHz to 1000 MHz or 80 MHz to 40 GHz, 1-300 V/m. Special-application probes have sensitivity down to 0.15 V/m or up to 3000 V/m. Two H-field probes provide sensitivity down to 15 mA/m from 5 to 300 MHz and down to 0.15 A/m from 300 kHz to 30 MHz, respectively.

PCB emissions scanner • Identifies frequency and location of emissions (10 MHz to 1.5 GHz) on powered-up and active printed circuit boards. Expedites correction of high-emission problems using before/after comparisons. Excellent precompliance test device for computers, wireless devices, and other products whose success depends on rapid product-to-market cycles. Helps establish minimum solutions to achieve compliance, reducing product price.

Antennas • 10 kHz to 18 GHz of coverage, includes high-gain horns, log-periodic, cavity exciting, E-field generators, and broadband transmission line.

Dual directional couplers • 13 models up to 15 kW CW, 10 kHz to 18 GHz, matched to Amplifier Research amplifiers and antennas for measuring forward and reflected power.

Broadband fiberoptic data links • Modular plug-in analog systems for acquiring and measuring interference data, simulating EUT, and displaying results. dc to 1 GHz. Used extensively in automotive susceptibility testing.

Fiberoptic CCTV systems • Watch performance of EUT under hostile EMI and/or EMP shielded-room conditions. Interference-free viewing, dc to 40 GHz, up to 200 V/m. Remote-control shielded camera. Color or b&w.

TEM cells • Half again the bandwidth of comparable-size chambers: to 750 MHz for 15-cm EUT, to 375 MHz for 30-cm EUT.

Broadband low-noise preamplifier • Increases the dynamic range and sensitivity of systems with high noise figures. 10 kHz to 1 GHz, 30 dB gain (minimum), noise figure of 3.5 dB typical.

Broadband leveling and control preamplifier • For constant-field rf susceptibility testing requiring automatic power-output control; for NMR spectroscopy requiring pulsing, blanking, rf delay and pedestal output; and for other complex rf testing applications. Provides 40 db of automatic gain control from 10 kHz to 1 GHz. Accepts monitor input voltage of any polarity (positive, negative, differential).

1-800-933-8181

Call toll-free and one of our applications engineers will answer the phone.

ar AMPLIFIER RESEARCH®
160 School House Road
Souderton, PA 18964-9990 USA
TEL 215-723-8181 • FAX 215-723-5688

For engineering assistance, sales, and service throughout Europe, call
EMV: Munich, 89-614-1710; London, 01908-566556; Paris 1-64-61-63-29

www.ar-amps.com

10883

INFO/CARD 39

William G. Newhall, Theodore S. Rappaport, Dennis G. Sweeney, April 1996, p. 40.

"Measuring Range and Reliability for Part 15 Systems," Bernard Kasmir, May 1996, p. 28.

"Anritsu Wiltron's Site Master Drops Cell Site Maintenance Costs," Ken Harvey, June 1996, p. 62.

"CDMA Signals: A Challenge for Power Amplifiers," Klaus D. Tiepermann, September 1996, p. 72.

"Test Set Measures Phase Noise Within 5 Hz of the RF Carrier," Charles Luke, October 1996, p. 66.

"Fine Phase-Error Measurements for a Quadrature Demodulator," John T. Clark and Edward A. Viveiros Jr., November 1996, p. 28.

"Integrated Test Solution Emulates Real-World Environment," Alex Kim, December 1996, p. 30.

Transmission lines and couplers

"Coaxial Cables," Jim Weir, August 1996, p. 70.

"Linear Simulators Offer Successful Microstrip Modeling for Wilkinson Power Splitters," Sean Mercer, September 1996, p. 38.

"Intermodulation in Coaxial Connectors," John King, September 1996, p. 68.

Transmitters and receivers

"Build a One-Tube Regenerative Receiver," Mark Starin, January 1996, p. 62.

"One-transistor Transmitter Circuits," William Rynone and S. Kan, February 1996, p. 82.

"Simple Direct-Conversion Receiver Checks Frequency Counters," Michael A. Covington, April 1996, p. 102.

An Inexpensive Receiver Preselector," Eric Kushnick, June 1996, p. 56.

Miscellaneous articles

Previews of the Dallas RF Design Seminars," January 1996, p. 44.

"A New Statistical Method for Designing Circuits and Systems," Peter Vizmuller, February 1996, p. 41.

"What You Should Know Before Returning to School for That Advanced Degree," Jeff Reed, Ted Rappaport and Brian Woerner, March 1996, p.67.

"Measured Effects of Seasonal Foliage Growth on a Short UHF Telemetry Link," Noel E. Evans, May 1996, p. 74.

"Coping With Cost Constraints in a Market-Driven Economy," Ernest Worthman, July 1996, p. 54.

"The Complete Article Index: 1996," December 1996, p. 54. *RF*

RETURN LOSS BRIDGES

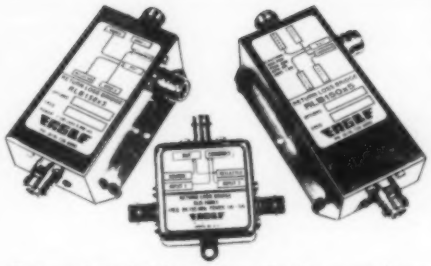

FEATURES:

5 watt power
High directivity
RF reflected port
Replaceable pins
Internal reference
Rugged construction

Return loss bridges from Eagle cover from .04 MHz to 3.0 GHz. A robust five watt power rating, unmatched in the industry, allows for versatile measurements. Optional replaceable center pins allow quick and economical repair of damaged connectors. Why pay more for bridges with fewer features than EAGLE?

FREE APPLICATION NOTE: High Performance VSWR Measurements

Models Available				
NUMBER	FREQ RANGE	DIRECT	O/S Ratio	PRICE
RLB150B1	.04-150 MHz	>45 dB	<0.5 dB	$319.00
RLB150N3B	5-1000 MHz	>45 dB	<0.5 dB	$469.00
RLB150N5A	5-3000 MHz	>40 dB	<1.0 dB	$650.00

EAGLE

VOICE: (520) 204-2597
FAX: (520) 204-2568
PO Box 4010 Sedona, AZ, 86340

INFO/CARD 51

Collins Bandpass Mechanical Filters

YOUR CUSTOMER DESERVES THE BEST

- Volume Pricing As Low As $20.00
- *Delay Equalized Types For Wireless Comm*
- Center Frequencies From 100 kHz to 550 kHz
- Bandwidths From 0.1% to 5%
- Small, Reliable, Rugged

Rockwell

Filter Products
Rockwell
2990 Airway Ave.
Costa Mesa, CA 92626
(714) 641-5315
FAX: (714) 641-5320

INFO/CARD 58